

FREESTANDING P.A.V. 1200

The accessibility to stages and podiums, without works. Installation in a few minutes!

The freestanding P.A.V. 1200 had been designed to allow the accessibility to the stage.

Main characteristics

Max. load: 320 kg

Crossing height max.: 1200 mm

Easy adjustable stroke

Useful platform dimensions:

900 x 1400 mm

Overall dimensions: 1420 x 2050 x 2035 mm

- Machine simply placed on the ground
- Emergency stop «push button»
- Pressure maintained command
- Right or Left version
- Distance command wireless, without battery
- Opposite: Entrance Exit
- 1 year guarantee

Technical characteristics

Empty weight: 165 kg

24V brake engine of 800W

Endless screw drive

Main power: Transformer (connection to a

230V plug)

Emergency power supply (Two 24V 12 Ah hatteries)

- 2nd safety nut with security contact
- 2 guide rails with ball bearing guide
- Nonskid chequered sheet steel
- Anti-crushing plate under the platform







Our Freestanding P.A.V. 1200 machine meets the current standard requirements, particularly:


- Security European directives CE
- Anti-crushing plate under the platform
- New design
- Integrated transport wheels

Material also available to the rent

Available for lower races to limite the mechanism height

DESIGNER & MANUFACTURER INSTALLATION AND MAINTENANCE OF OUR MACHINES

Specialized in accessibility, we adapt our machines to allow its setting up easier, while minimizing ancillary works. (no pit, simple socket nearby, adaptation of machine dimensions to the building technical constraints.)

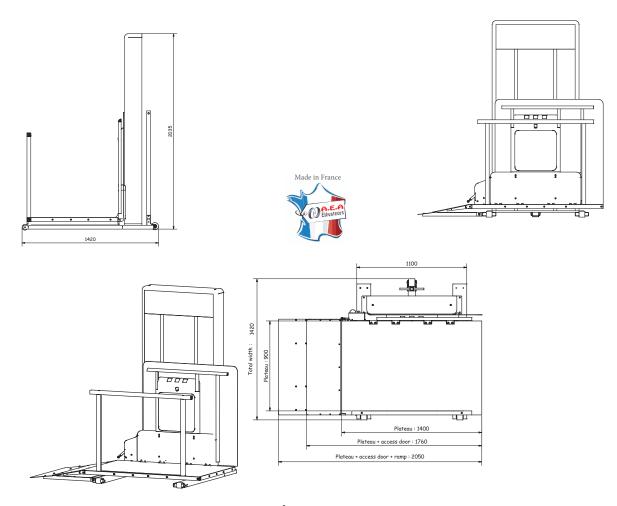

A.E.A Élévateurs

ZI du Hagis - Allée Robert Schumann - BP45 - 88110 Raon l'Étape - Phone : +33 3 29 41 38 50 e-mail : contact@aea-elevateurs.fr - Website : www.aea-elevateurs.com

G-mail: comact@aca-cicvatcars.ii - website: www.aca-cicvatcars.com